

## **HTXFD-\*\*96-40BD**

### **10Gb/s 40km DWDM XFP Optical Transceiver**

#### **PRODUCT FEATURES**

- Hot-pluggable XFP footprint
- Supports 9.95Gb/s to 11.3Gb/s bit rates
- Supports Lineside and XFI loopback
- RoHS-6 Compliant (lead-free)
- Power dissipation <3.5W
- Case temperature range:0°C to 70°C
- Maximum link length of 40km
- Cooled DWDM EML and PIN Receiver
- Full Duplex LC connector
- No Reference Clock required
- Built-in digital diagnostic functions
- Standard bail release mechanism

#### **APPLICATIONS**

- 10GBASE-ER/EW 10G Ethernet
- 40KM 10G Fiber Channel
- SONET OC-192 &SDH STM 64

## PRODUCT DESCRIPTION

**HTXFD-\*\*96-40BD** Small Form Factor 10G (XFP) transceivers are compliant with the current XFP Multi-Source Agreement (MSA) Specification. They comply with 10-Gigabit Ethernet 10GBASE-ER/EW per IEEE 802.3ae. Digital diagnostics functions are available via a 2-wire serial interface, as specified in the XFP MSA. The transceiver is RoHS compliant and leads free per Directive 2002/95/EC<sup>3</sup>.

### I . Absolute Maximum Ratings

Parameter	Symbol	Min	Typ	Max	Unit	NOTE
Maximum Supply Voltage 1	Vcc3	-0.5		4.0	V	
Maximum Supply Voltage 2	Vcc5	-0.5		6.0	V	
Storage Temperature	T <sub>S</sub>	-40		85	°C	
Case Operating Temperature	T <sub>case</sub>	0		70	°C	

### II. Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	NOTE
Main Supply Voltage	Vcc5	4.75		5.25	V	
Supply Voltage #2	Vcc3	3.13		3.45	V	
Supply Current – Vcc5 supply	Icc5			320	mA	
Supply Current – Vcc3 supply	Icc3			450	mA	
Module total power	P			3.5	W	1
<b>Transmitter</b>						
Input differential impedance	R <sub>in</sub>		100		Ω	2
Differential data input swing	V <sub>in,pp</sub>	120		820	mV	
Transmit Disable Voltage	V <sub>D</sub>	2.0		Vcc	V	3
Transmit Enable Voltage	V <sub>EN</sub>	GND		GND+ 0.8	V	
Transmit Disable Assert Time				10	us	
<b>Receiver</b>						
Differential data output swing	V <sub>out,pp</sub>	340	650	850	mV	4
Data output rise time	t <sub>r</sub>			38	ps	5
Data output fall time	t <sub>f</sub>			38	ps	5
LOS Fault	V <sub>LOS fault</sub>	Vcc – 0.5		VccHOST	V	6
LOS Normal	V <sub>LOS norm</sub>	GND		GND+0.5	V	6
Power Supply Rejection	PSR			See Note 6 below		7

#### Notes:

1. Maximum total power value is specified across the full temperature and voltage range.
2. After internal AC coupling.
3. Or open circuit.
4. Into 100 ohms differential termination.
5. These are unfiltered 20-80% values
6. Loss Of Signal is open collector to be pulled up with a 4.7k – 10kohm resistor to 3.15 – 3.6V. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
7. Per Section 2.7.1. in the XFP MSA Specification1.

### III. Optical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	NOTE

<b>Transmitter</b>						
Average Optical Power	P <sub>f</sub>	-1		4	dBm	
Optical Wavelength	$\lambda_c$	$\lambda_c -0.1$		$\lambda_c +0.1$	nm	
Center Wavelength Spacing			50		GHz	2
Side mode Suppression ratio	SMSR	30			dB	
Optical Extinction Ratio	ER	8.2			dB	
Transmitter and Dispersion Penalty	TDP			2	dB	
Average Launch power of OFF transmitter	P <sub>OFF</sub>			-30	dBm	
Tx Jitter	T <sub>xj</sub>	Compliant with 802.3ae requirements				
<b>Receiver</b>						
Receiver Sensitivity	R <sub>SENS</sub>			-16.5	dBm	1
Input Saturation Power (Overload)	P <sub>sat</sub>	+0.5			dBm	
Wavelength Range	$\lambda_c$	1260		1600	nm	
Receiver Reflectance	R <sub>RX</sub>			-27	dB	
LOS De-Assert	LOS <sub>D</sub>			-18	dBm	
LOS Assert	LOS <sub>A</sub>	-32			dBm	
LOS Hysteresis		0.5			dB	

#### Notes:

1. Measured with BER<10<sup>-12</sup> @10.3Gbps, 2<sup>31</sup> – 1 PRBS.
2. Corresponds to approximately 0.4 nm.

## IV. Pin Assignment

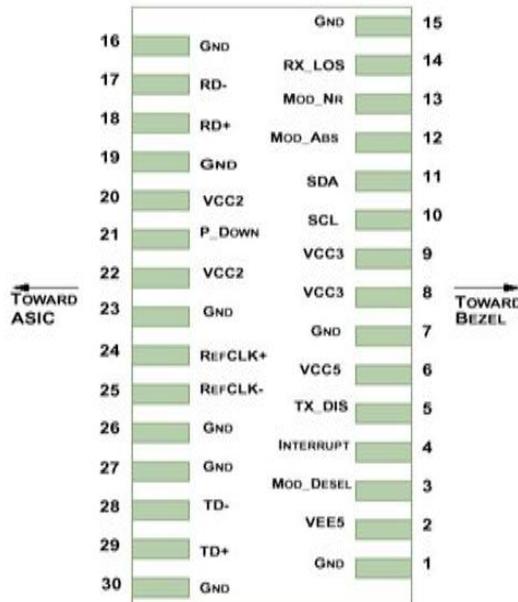


Diagram of Host Board Connector Block Pin Numbers and Name

Pin	Logic	Symbol	Name/Description	NOTE
1		GND	Module Ground	1
2		VEE5	Optional -5.2 Power Supply – <b>Not required</b>	
3	LVTTI-I	Mod-Desel	Module De-select; When held low allows the module to respond to 2-wire serial interface commands	

4	LVTTL-O	Interrupt	Interrupt (bar); Indicates presence of an important condition which can be read over the serial 2-wire interface	2
5	LVTTL-I	TX_DIS	Transmitter Disable; Transmitter laser source turned off	
6		VCC5	+5 Power Supply	
7		GND	Module Ground	1
8		VCC3	+3.3V Power Supply	
9		VCC3	+3.3V Power Supply	
10	LVTTL-I	SCL	Serial 2-wire interface clock	2
11	LVTTLI/O	SDA	Serial 2-wire interface data line	2
12	LVTTL-O	Mod_Abs	Module Absent; Indicates module is not present. Grounded in the module.	2
13	LVTTL-O	Mod_NR	Module Not Ready; Hirundo defines it as a logical OR between RX_LOS and Loss of Lock in TX/RX.	2
14	LVTTL-O	RX_LOS	Receiver Loss of Signal indicator	2
15		GND	Module Ground	1
16		GND	Module Ground	1
17	CML-O	RD-	Receiver inverted data output	
18	CML-O	RD+	Receiver non-inverted data output	
19		GND	Module Ground	1
20		VCC2	+1.8V Power Supply – <b>Not required</b>	
21	LVTTLI	P_Down/RST	Power Down; When high, places the module in the low power stand-by mode and on the falling edge of P_Down initiates a module reset  Reset; The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a power cycle.	
22		VCC2	+1.8V Power Supply – <b>Not required</b>	
23		GND	Module Ground	1
24	PECL-I	RefCLK+	Reference Clock non-inverted input, AC coupled on the host board – <b>Not required</b>	3
25	PECL-I	RefCLK-	Reference Clock inverted input, AC coupled on the host board – <b>Not required</b>	3
26		GND	Module Ground	1
27		GND	Module Ground	1
28	CML-I	TD-	Transmitter inverted data input	
29	CML-I	TD+	Transmitter non-inverted data input	
30		GND	Module Ground	1

#### Notes:

1. Module circuit ground is isolated from module chassis ground within the module
2. Open collector; should be pulled up with 4.7k – 10kohms on host board to a voltage between 3.15V and 3.6V.
3. A Reference Clock input is not required by the HTXFD-\*\*96-40BD . If present, it will be ignored.

## V. General Specifications

Parameter	Symbol	Min	Typ	Max	Units	NOTE
Bit Rate	BR	9.95		11.3	Gb/s	1
Bit Error Ratio	BER			$10^{-12}$		2
Max. Supported Link Length	L <sub>MAX</sub>			40	km	1

#### Notes:

1. 10GBASE-ER/EW.
2. Tested with 10.3Gbps,  $2^{31} - 1$  PRBS

## VI. Digital Diagnostic Functions

As defined by the XFP MSA, Hirundo XFP transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameters:

- Transceiver temperature
- Laser bias current
- Transmitted optical power
- Received optical power
- Transceiver supply voltage

It also provides a sophisticated system of alarm and warning flags, which may be used to alert end-users when particular operating parameters are outside of a factory-set normal range.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through the 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL pin) is generated by the host. The positive edge clocks data into the XFP transceiver into those segments of its memory map that are not write-protected. The negative edge clocks data from the XFP transceiver. The serial data signal (SDA pin) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. The 2-wire serial interface provides sequential or random access to the 8 bit parameters, addressed from 000h to the maximum address of the memory.

For more detailed information including memory map definitions, please see the XFP MSA Specification.


## VII. HTXFD-\*\*96-40BD center wavelength C-band λc Wavelength Guide Pin Descriptions

Channel	Wavelength (nm)	Frequency(THZ)	Channel	Wavelength (nm)	Frequency (THZ)
C17	1563.86	191.70	C39	1546.12	193.90
H17	1563.45	191.75	H39	1545.72	193.95
C18	1563.05	191.80	C40	1545.32	194.00
H18	1562.64	191.85	H40	1544.92	194.05
C19	1562.23	191.90	C41	1544.53	194.10
H19	1561.83	191.95	H41	1544.13	194.15
C20	1561.42	192.00	C42	1543.73	194.20

H20	1561.01	192.05	H42	1543.33	194.25	
C21	1560.61	192.10	C43	1542.94	194.30	
H21	1560.20	192.15	H43	1542.54	194.35	
C22	1559.79	192.20	C44	1542.14	194.40	
H22	1559.39	192.25	H44	1541.75	194.45	
C23	1558.98	192.30	C45	1541.35	194.50	
H23	1558.58	192.35	H45	1540.95	194.55	
C24	1558.17	192.40	C46	1540.56	194.60	
H24	1557.77	192.45	H46	1540.16	194.65	
C25	1557.36	192.50	C47	1539.77	194.70	
H25	1556.96	192.55	H47	1539.37	194.75	
C26	1556.55	192.60	C48	1538.98	194.80	
H26	1556.15	192.65	H48	1538.58	194.85	
C27	1555.75	192.70	C49	1538.19	194.90	
H27	1555.34	192.75	H49	1537.79	194.95	
C28	1554.94	192.80	C50	1537.40	195.00	
H28	1554.54	192.85	H50	1537.00	195.05	
C29	1554.13	192.90	C51	1536.61	195.10	
H29	1553.73	192.95	H51	1536.22	195.15	
C30	1553.33	193.00	C52	1535.82	195.20	
H30	1552.93	193.05	H52	1535.43	195.25	
C31	1552.52	193.10	C53	1535.04	195.30	
H31	1552.12	193.15	H53	1534.64	195.35	
C32	1551.72	193.20	C54	1534.25	195.40	
H32	1551.32	193.25	H54	1533.86	195.45	
C33	1550.92	193.30	C55	1533.47	195.50	
H33	1550.52	193.35	H55	1533.07	195.55	
C34	1550.12	193.40	C56	1532.68	195.60	
H34	1549.72	193.45	H56	1532.29	195.65	
C35	1549.32	193.50	C57	1531.90	195.70	
H35	1548.91	193.55	H57	1531.51	195.75	
C36	1548.51	193.60	C58	1531.12	195.80	
H36	1548.11	193.65	H58	1530.72	195.85	
C37	1547.72	193.70	C59	1530.33	195.90	
H37	1547.32	193.75	H59	1529.94	195.95	
C38	1546.92	193.80	C60	1529.55	196.00	
H38	1546.52	193.85	H60	1529.16	196.05	
Non-ITU	Peak wavelength between 1528.77nm-1563.86			C61	1528.77	196.10


### VIII. Mechanical Specifications

Hirundo's XFP transceivers are compliant with the dimensions defined by the XFP Multi-Sourcing Agreement (MSA).

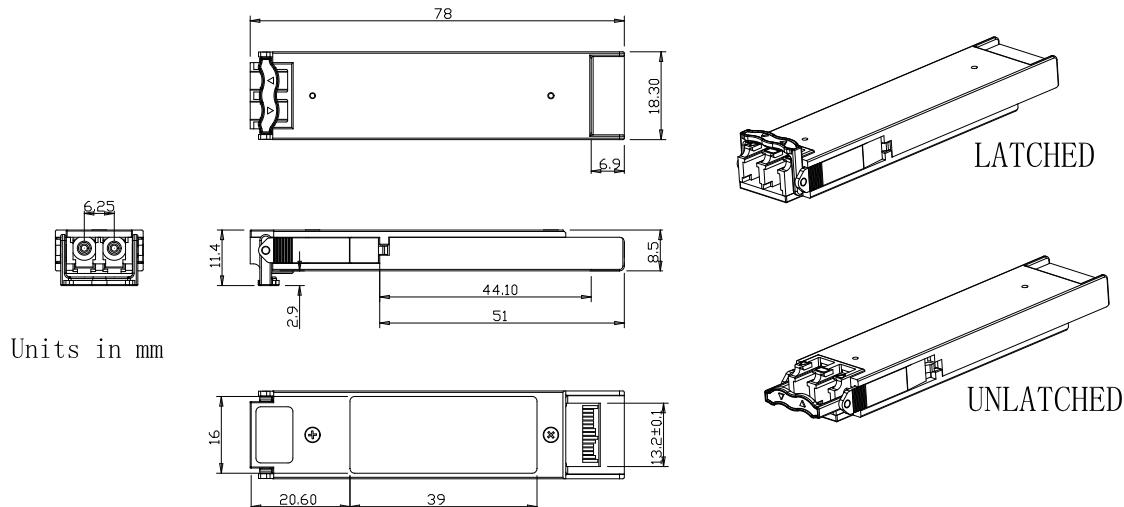


XFP Transceiver (dimensions are in mm)


## IX. PCB Layout and Bezel Recommendations

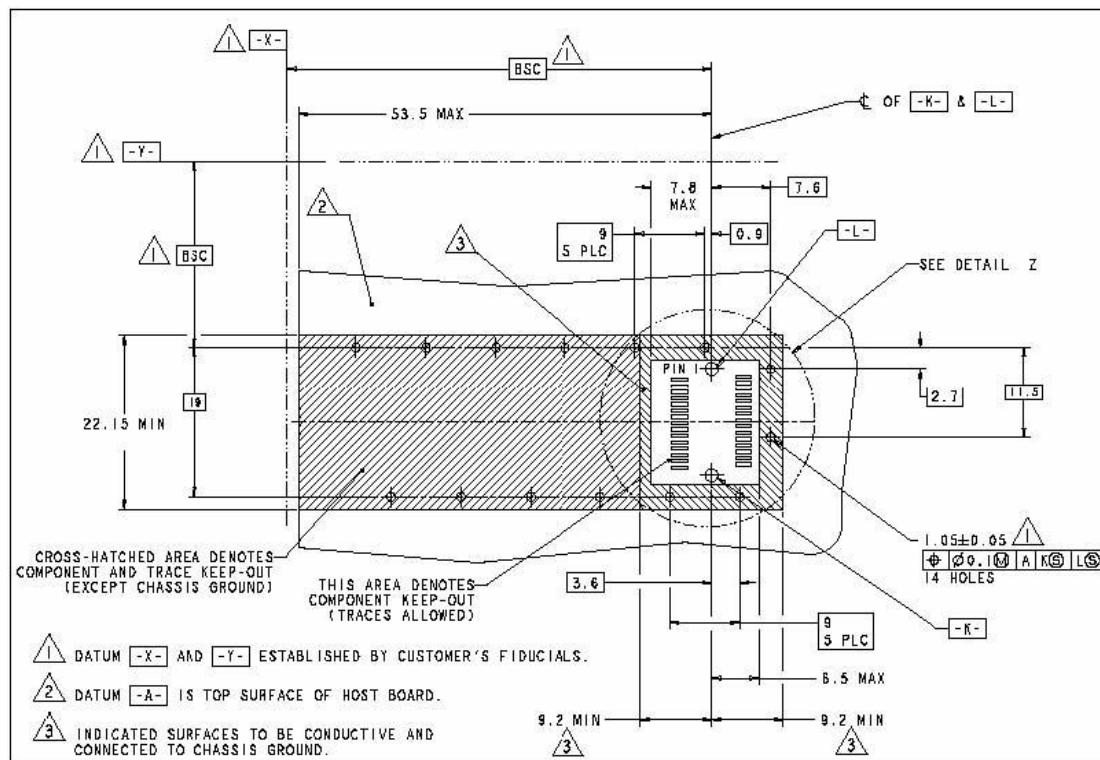

XFP Host Board Mechanical Layout (dimensions are in mm)

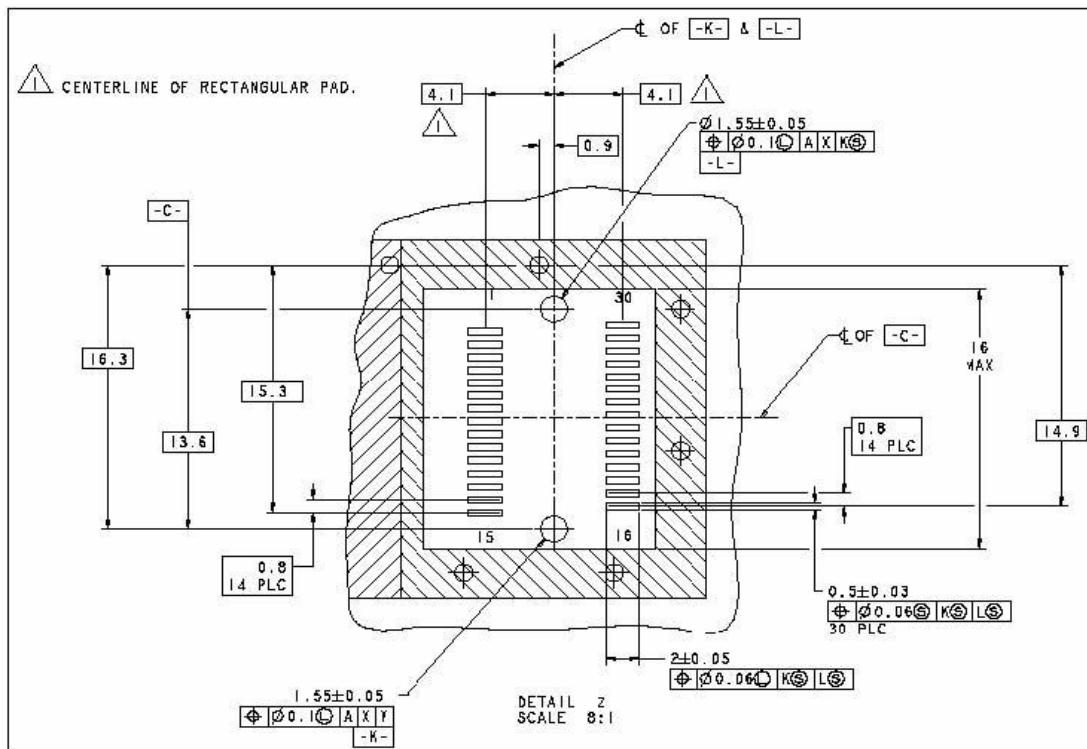

XFP Detail Host Board Mechanical Layout (dimensions are in mm)

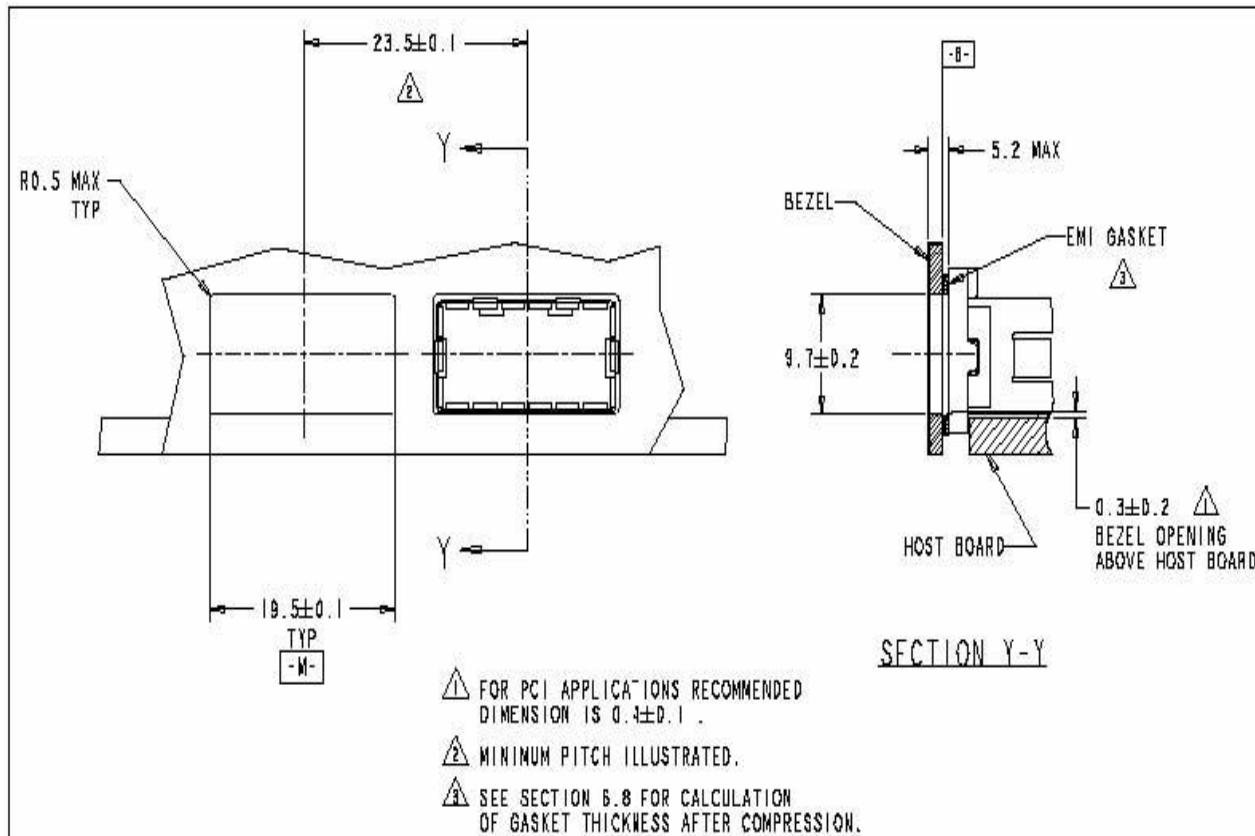

## X. Regulatory Compliance

Feature	Reference	Performance
Electrostatic discharge (ESD)	IEC/EN 61000-4-2	Compatible with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN 55022 Class B (CISPR 22A)	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10, 1040.11 IEC/EN 60825-1, 2	Class 1 laser product
Component Recognition	IEC/EN 60950 , UL	Compatible with standards
ROHS	2002/95/EC	Compatible with standards
EMC	EN61000-3	Compatible with standards

#### Appendix A. Document Revision

Version No.	Date	Description
1.0	2020-09-01	Preliminary datasheet